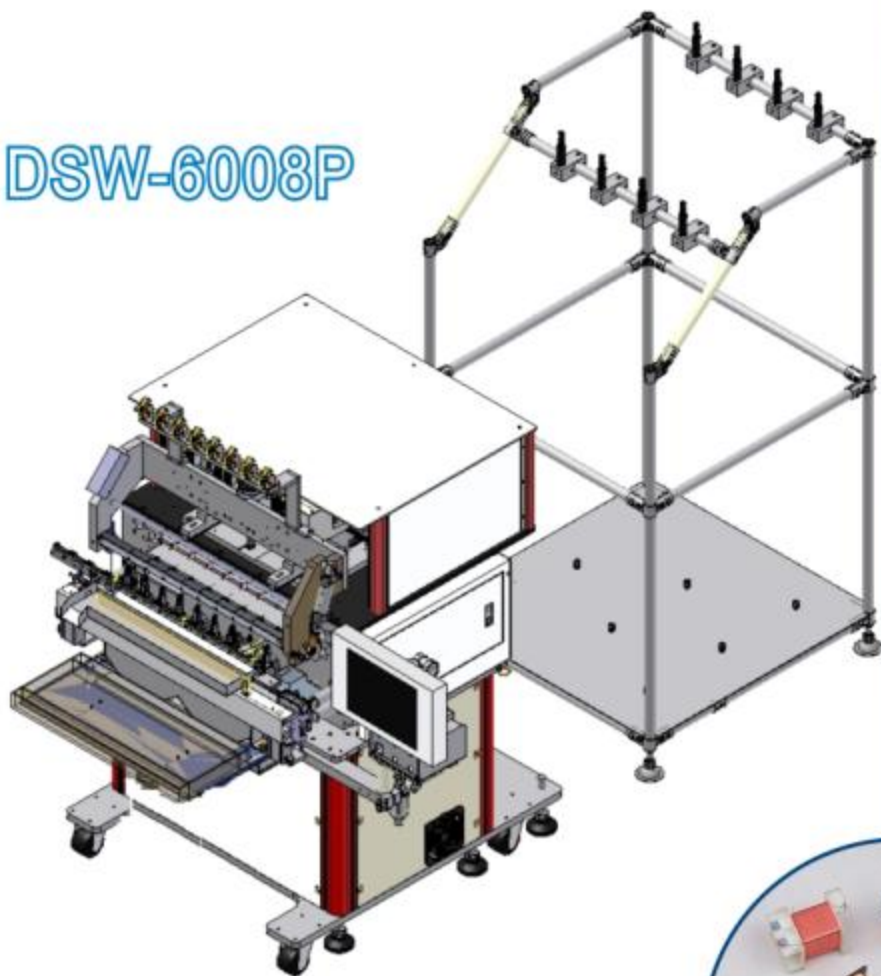


**DETZO****Feature:**

1. CNC 4 axes AC servo motor driven, High precision indexing
2. 0°, 90°, 120° pin wrapping is available
3. Quickly Chang Winding Tooling
4. High precision tensioner to control winding pressure
5. Auto snap wire cut, no residual wire
6. WIN CE program, 10" LCD panel to dialogue and program editing
7. Code saving prevent program changed
8. Operation easily, convenient maintenance

# 8 Spindles Automatic Winding

**DSW-6008P****Machine spec.:**

Controller	CNC 4 axes AC servo motor
Program storage:	USB 1GB, build-in 8 MB memory
Spindle speed	Max 13,500 rpm CW/CCW
Spindle	8 Spindles
Spindle pitch	60 mm
Wire dia.	$\phi 0.03 \sim \phi 0.3\text{mm}$
Max winding diagonal	Max. 50 mm
Max winding length	Max. 80 mm
Rotating angle	360° / circle
Angle precision	+/- 0.5°
Wrapping speed	Max. 150 turns/min.
Wrapping angle	0°, 90°, 120°

**Nozzle movement:**

X Axis	90 mm +/- 0.01 m/m
Y Axis	130 mm +/- 0.01 m/m
Z Axis	60 mm +/- 0.01 m/m

Power supply	AC 220V ; 1PH ; 50/60Hz / 3KVA
Air pressure	4~6 kg/cm <sup>2</sup>
Machine size	1390(L) x 290(W) x 450(H)mm